




ANALOG AUDIO DISTRIBUTION AMPLIFIER *DigiFlex 1651*

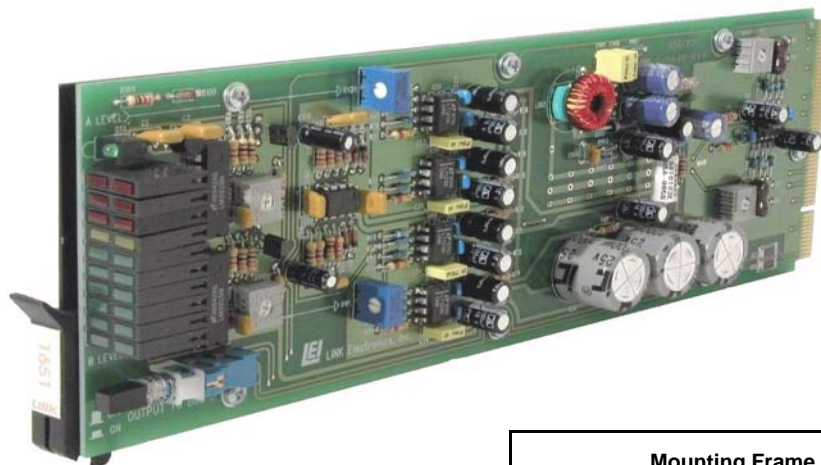

Mounting Frame Options

- 1000 - Single Power Supply, Holds 11 Modules
- 1000/2 - Dual Power Supply, Holds 10 Modules
- 7200 - Mounting Frame, Holds 1 Module

FEATURES

- ◆ Low Noise
- ◆ Eight Mono Outputs or
- ◆ Four Stereo Outputs
- ◆ Signal Presence LED

LINK's DigiFlex 1650/1651 Stereo Audio Distribution Amplifier takes advantage of the latest in Operational Amplifier technology. The front end is high-impedance, balanced, with high common-mode rejection. The output amplifier is capable of driving low impedance (150Ω) loads and is compensated for load capacitance of up to 10,000pF. Its wide bandwidth ($>120\text{KHz}$) will allow for the distribution of SMPTE Time Code or BTSC Baseband Stereo.

Ultra low-noise components (including metal-oxide resistors) are used throughout the audio signal path. Both the input buffer and output driver offer noise figures of $<7\text{nV}/\text{Hz}^{1/2}$. In addition, extreme care has been taken in the printed circuit board design to reduce noise and improve channel isolation. The 1650 and 1651 are identical with one exception: the 1651 has logarithmic bar graph level meters for the left and right channel signal indication.

FEATURES

- ◆ 11 Modules per Frame
- ◆ $>100\text{dB}$ S/N Ratio
- ◆ A/B Buss Monitoring
- ◆ 1651 Level Meters

The LINK 1650/1651 has a unique signal presence indicator on the rear panel. The rear panel module with build-out resistors and fixed terminal blocks is the model 1014. Plug-in terminal blocks are available on the 1021 Rear Cell. The front panel features a DC power supply monitor LED.

The LINK 1650/1651 is designed to reside in LINK's DigiFlex 1000 frame. This rugged 2RU frame can house up to 11 modules. An audio buss runs the full length of the frame to allow monitoring of any of the resident audio distribution amplifiers by a single monitoring amplifier, model 1626. A switch on the front of the module places the audio signal on the frame buss. The versatile DigiFlex 1000 frame can also accommodate AES/EBU Digital Audio distribution (using the DigiFlex 1652) as well as Analog and Digital Video distribution. Backed by LINK's 10-year warranty, the 1650/1651 will provide years of outstanding performance.

DIGIFLEX 1651 AUDIO DISTRIBUTION AMP

SPECIFICATIONS

INPUT:

Impedance: 20K Ohm, $\pm 2\%$ Balanced
Max. Level: 20 dBu, Differential
Common Mode Range: ± 10 Volts
Common Mode Rejection: >85 dB @ 60Hz

OUTPUT:

Channels: 2
Number of Outputs per Channel: 4
Impedance: 66 Ohms
Max. Level: +18 dBu
..... Load = 4 X 150 Ω

PERFORMANCE:

Gain Range: -inf. to +8dB
S/N Ratio: >100 dB A WTD +8dBu 0 Gain
Frequency Response: ± 0.2 dB, 20Hz to 20KHz
Total Harmonic Distortion: $<0.01\%$ +8dBu 0 Gain
Load = 4 X 150 Ω
Crosstalk: 90dB, 20Hz to 20KHz
DC Offset: <10 mV
Quiescent Drain Current: ± 100 mA
Monitor Switch: Places signal on Frame Buss
Level Indication: Bar Graph (1651 only)
Temperature Range: 0 $^\circ$ to 50 $^\circ$ C

INTERNAL ADJUSTMENTS

Audio Level: Resistive Trim
Common Mode Adjustment: Resistive Trim

MECHANICAL:

Height: 3.2"
Width: 1.0"
Length: 10.0"
Weight: 8.0oz

LINK ELECTRONICS, INC.

2137 Rust Avenue
Cape Girardeau, MO 63703
Phone: 573 334 4433
FAX: 573 334 9255

PROFESSIONAL SERIES--

modular system products--by **LINK**

1651/111302



1014 REARCELL



1021 REARCELL